


1.25mm WTB (CF13) Series Connector:

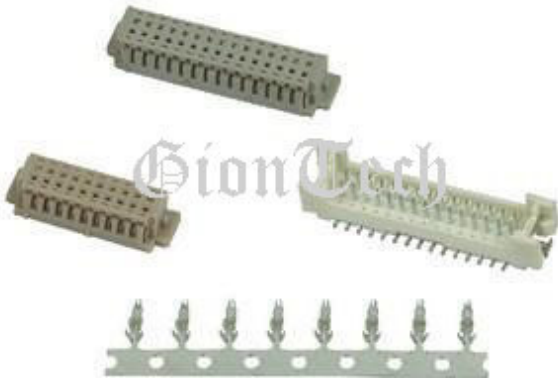


SPECIFICATIONS


Pitch:	1.25 mm
Useable Wire Range:	AWG 32# ~ 26#
Current Rating:	1A, AC, DC
Voltage Rating:	100V, AC, DC
Operating Temperature:	-25°C ~ +85°C
Relative Humidity:	93%, +40°C
Dielectric Withstanding:	500V AC/minute
Contact Resistance:	≤ 20 mΩ/Contact
Insulator Resistance:	≥ 500 MΩ at 100V
Material:	
Base:	Nylon6T/LCP, UL94V-0
Contact Pin:	Phosphor Bronze
Housing:	Nylon46/ Nylon66, UL94V-0
Terminal:	Phosphor Bronze

ROHS Compliance


CF13-T



CF13-XAB

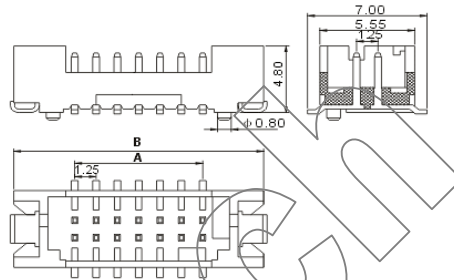

CF13-XY

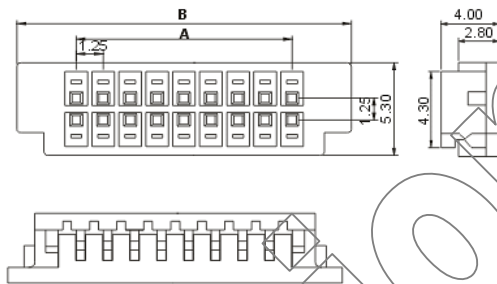

Circuit	Part No.		Dimensions (mm)	
			A	B
10	CF13-10Y	CF13-10AB	5.00	12.00
20	CF13-20Y	CF13-20AB	11.25	18.25
30	CF13-30Y	CF13-30AB	17.50	24.50
40	CF13-40Y	CF13-40AB	23.75	30.75