


### 1.27mm BTB (BB1.27) Series Connector:

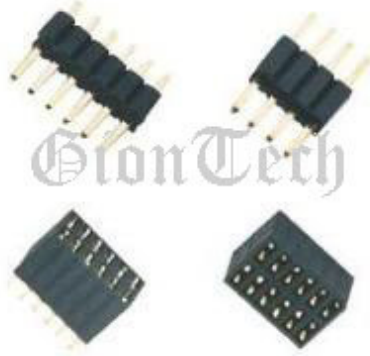


#### SPECIFICATIONS


Pitch:	1.27 mm
Number of contacts:	2 to 40 pins, 4-80 pins
Current Rating:	1.0A, AC, DC
Voltage Rating:	250V, AC, DC
Operating Temperature:	-25°C ~+85°C
Relative Humidity:	93%, +40°C
Dielectric Withstanding:	500V AC/minute
Contact Resistance:	≤ 20 mΩ/Contact
Insulator Resistance:	≥ 800 MΩ at 100V
Material:	
Base:	Nylon66 /Nylon6T, UL94V-0
Contact Pin:	Phosphor Bronze

#### ROHS Compliance


#### BB1.27-XAM




#### BB1.27-XAF

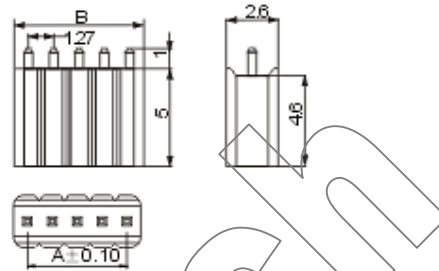


#### BB1.27-2xXAM



#### BB1.27-2xXAF



#### BB1.27-2xXABM

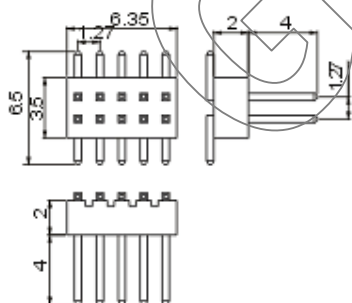

#### BB1.27-2xXABF

