

2.0mm WTB (SFA) Series Connector:




SPECIFICATIONS


Pitch: 2.0 mm
 Useable Wire Range: AWG 30# ~ 24#
 Current Rating: 3A, AC, DC
 Voltage Rating: 250V, AC, DC
 Operating Temperature: -25°C ~ +85°C
 Relative Humidity: 93%, +40°C
 Dielectric Withstanding: 800V AC/minute
 Insulator Resistance: ≥ 1000 MΩ at 100V
 Material:
 Housing: Nylon66/ Nylon6T, UL94V-0
 Terminal: Phosphor Bronze

ROHS Compliance


SFA-T



SFA-XP

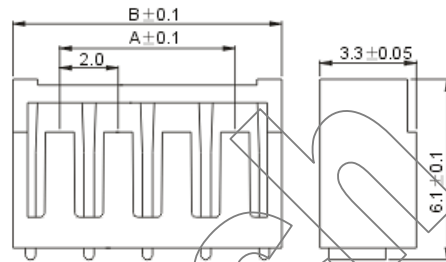

ASSEMBLY DIAGRAM



Circuit	Part No.	Dimensions (mm)	
		A	B
2	SFA-2P	2.00	5.20
3	SFA-3P	4.00	7.20
4	SFA-4P	6.00	9.20
5	SFA-5P	8.00	11.20
6	SFA-6P	10.00	13.20
7	SFA-7P	12.00	15.20
8	SFA-8P	14.00	17.20
9	SFA-9P	16.00	19.20
10	SFA-10P	18.00	21.20
11	SFA-11P	20.00	23.20
12	SFA-12P	22.00	25.20
13	SFA-13P	24.00	27.20
14	SFA-14P	26.00	29.20
15	SFA-15P	28.00	31.20
16	SFA-16P	30.00	33.20