

2.5mm WTB (JVC) Series Connector:




SPECIFICATIONS


Pitch:	2.5 mm
Useable Wire Range:	AWG 28# ~ 22#
Current Rating:	3A, AC, DC
Voltage Rating:	250V, AC, DC
Operating Temperature:	-25°C ~ +85°C
Relative Humidity:	93%, +40°C
Dielectric Withstanding:	1000V AC/minute
Contact Resistance:	≤ 20 mΩ/Contact
Insulator Resistance:	≥ 1000 MΩ at 100V
Material:	
Base:	Nylon66/ Nylon6T, UL94V-0
Contact Pin:	Brass
Housing:	Nylon66, UL94V-0
Terminal:	Phosphor Bronze

ROHS Compliance


JVC-T




JVC-XA

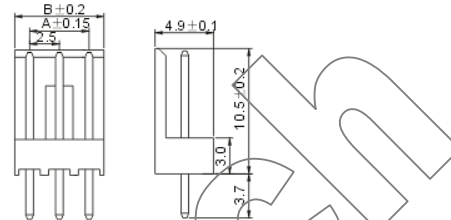

JVC-XY



JVC-XAW

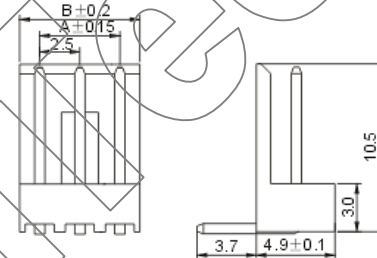

Circuit	Part No.			Dimensions (mm)	
				A	B
2	JVC-2Y	JVC-2A	JVC-2AW	2.50	5.00
3	JVC-3Y	JVC-3A	JVC-3AW	5.00	7.50
4	JVC-4Y	JVC-4A	JVC-4AW	7.50	10.00
5	JVC-5Y	JVC-5A	JVC-5AW	10.00	12.50
6	JVC-6Y	JVC-6A	JVC-6AW	12.50	15.00
7	JVC-7Y	JVC-7A	JVC-7AW	15.00	17.50
8	JVC-8Y	JVC-8A	JVC-8AW	17.50	20.00
9	JVC-9Y	JVC-9A	JVC-9AW	20.00	22.50
10	JVC-10Y	JVC-10A	JVC-10AW	22.50	25.00
11	JVC-11Y	JVC-11A	JVC-11AW	25.00	27.50
12	JVC-12Y	JVC-12A	JVC-12AW	27.50	30.00