


**2.5mm WTB (SA) Series Connector:**

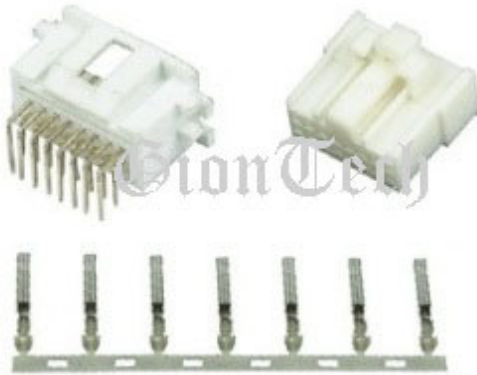


**SPECIFICATIONS**


Pitch:	2.5 mm
Useable Wire Range:	AWG 28# ~ 22#
Current Rating:	3A, AC, DC
Voltage Rating:	250V, AC, DC
Operating Temperature:	-25 °C ~ +85 °C
Relative Humidity:	93%, +40 °C
Dielectric Withstanding:	1000V AC/minute
Contact Resistance:	≤ 20 mΩ/Contact
Insulator Resistance:	≥ 1000 MΩ at 100V
Material:	
Base:	Nylon66/ Nylon6T, UL94V-0
Contact Pin:	Phosphor Bronze
Housing:	Nylon66, UL94V-0
Terminal:	Phosphor Bronze

**ROHS Compliance**

**SA-T**

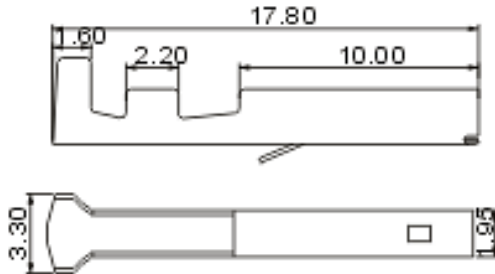

**SA-16AW**

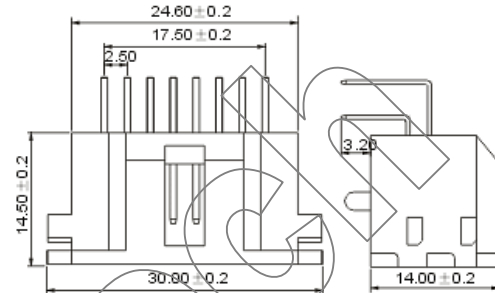

**SA-16Y**

