

3.5 x 4.7mm Tact Switch (R/A, SMT Type)



TSG/B-1I/1J/04S-XXXH


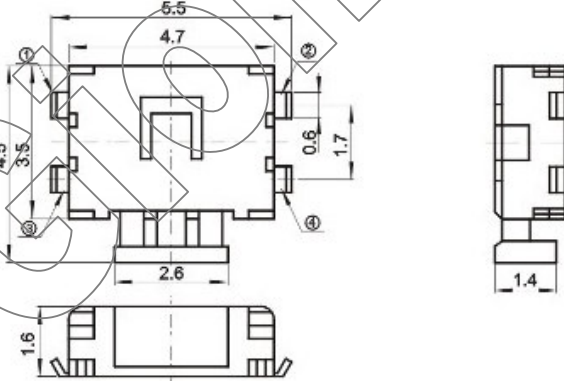
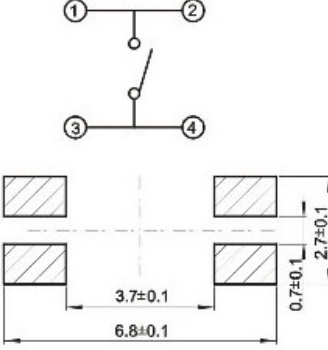
TS - Tact Switch
G - G Serious
1I / 1J / 04 – Type
S - SMT Type
XXX - Action Force (gram)
H - With Post (Optional)


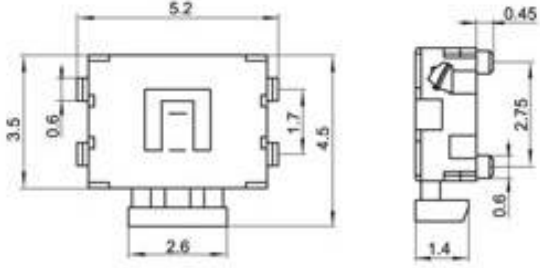
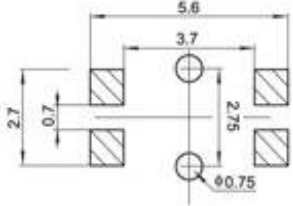

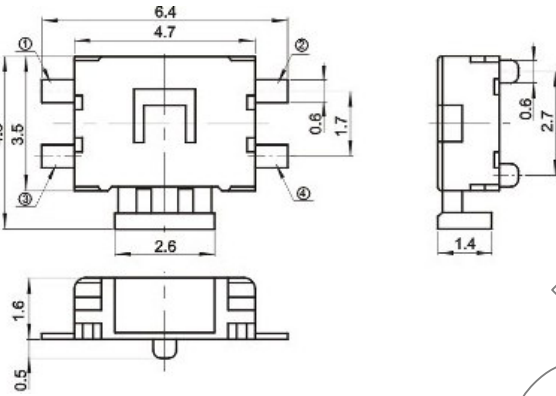
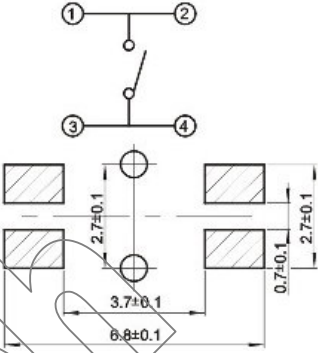
SPECIFICATIONS

Mechanical Life: 100,000 cycles
Operating Force: 180g±50g, 250g±50g
Travel: 0.2±0.1mm
Rating: 50mA 12V DC
Dielectric withstanding: 250V AC/minute
Insulator resistance: ≥ 100 MΩ at 100V
Contact resistance: ≤ 100 mΩ/Contact
Operating temperature: -30°C ~ +85°C
Storage temperature: -40°C ~ +85°C

Material

Base: LCP, UL94V-0
Contact material: Phosphor Bronze
Contact Spring Plating: Stainless Steel/Silver Plating

Physical Picture	Outline Drawing	Circuit
 <p>TSG-1IS-XXX</p>		

 <p>TSB-04S-XXXH</p>		
 <p>TSG-1JS-XXXH</p>		

GionTech