


3.96mm WTB (UH) Series Connector:

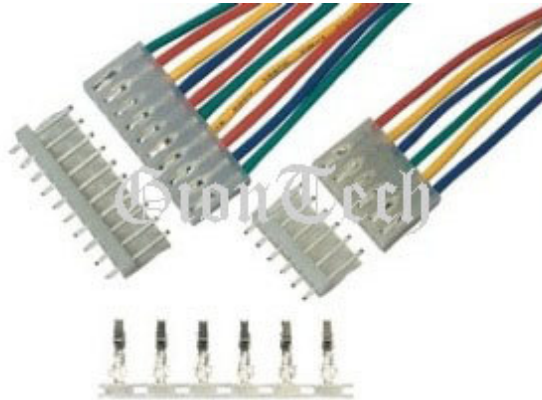


SPECIFICATIONS

Pitch:	3.96 mm
Useable Wire Range:	AWG 24# ~ 18#
Current Rating:	7A, AC, DC
Voltage Rating:	250V, AC, DC
Operating Temperature:	-25°C ~ +85°C
Relative Humidity:	93%, +40°C
Dielectric Withstanding:	1500V AC/minute
Contact Resistance:	≤ 10 mΩ/Contact
Insulator Resistance:	≥ 1000 MΩ at 100V


Material:	
Base:	Nylon66/ Nylon6T, UL94V-0
Contact Pin:	Brass
Housing:	Nylon66, UL94V-0
Terminal:	Phosphor Bronze

ROHS Compliance


UH-T




UH-XAW

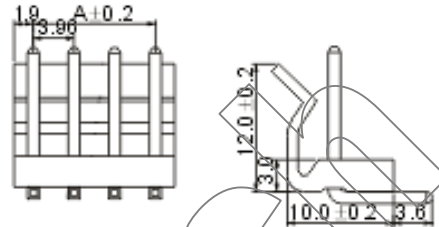


UH-XY

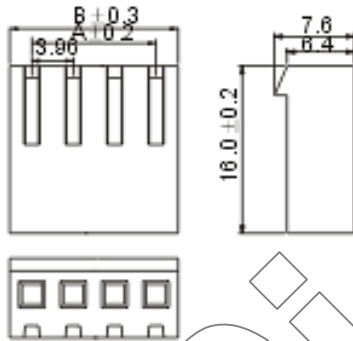

UH-XAWH

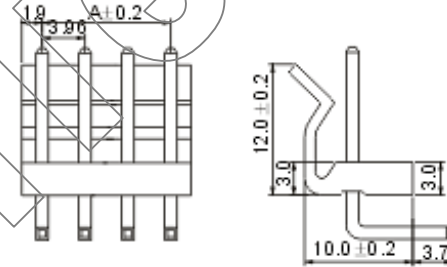

UH-XA

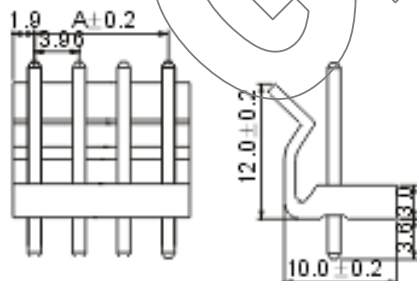

Circuit	Part No.				Dimensions (mm)	
					A	B
2	UH-2Y	UH-2A	UH-2AW	UH-2AWH	3.96	8.52
3	UH-3Y	UH-3A	UH-3AW	UH-3AWH	7.92	12.48
4	UH-4Y	UH-4A	UH-4AW	UH-4AWH	11.88	16.44
5	UH-5Y	UH-5A	UH-5AW	UH-5AWH	15.84	20.40
6	UH-6Y	UH-6A	UH-6AW	UH-6AWH	19.80	24.36
7	UH-7Y	UH-7A	UH-7AW	UH-7AWH	23.76	28.32
8	UH-8Y	UH-8A	UH-8AW	UH-8AWH	27.72	32.28
9	UH-9Y	UH-9A	UH-9AW	UH-9AWH	31.68	36.24
10	UH-10Y	UH-10A	UH-10AW	UH-10AWH	35.64	40.20
11	UH-11Y	UH-11A	UH-11AW	UH-11AWH	39.60	44.16
12	UH-12Y	UH-12A	UH-12AW	UH-12AWH	43.56	48.12
13	UH-13Y	UH-13A	UH-13AW	UH-13AWH	47.52	52.08
14	UH-14Y	UH-14A	UH-14AW	UH-14AWH	51.48	56.04
15	UH-15Y	UH-15A	UH-15AW	UH-15AWH	55.44	60.00
16	UH-16Y	UH-16A	UH-16AW	UH-16AWH	59.40	63.96

GionTech