

BC2.5A Series Battery Connector:




SPECIFICATIONS

Pitch:	2.5 mm
Number of contacts:	8 pins
Current Rating:	5A, AC, DC
Voltage Rating:	250V, AC, DC
Operating Temperature:	-40°C ~+85°C
Relative Humidity:	93%, +40°C
Dielectric Withstanding:	1000V AC/minute
Contact Resistance:	≤ 20 mΩ/Contact
Insulator Resistance:	≥ 500 MΩ at 100V
Material:	
Base:	PBT/Nylon6T, UL94V-0
Contact Pin:	Phosphor Bronze

ROHS Compliance

BC2.5A-8A

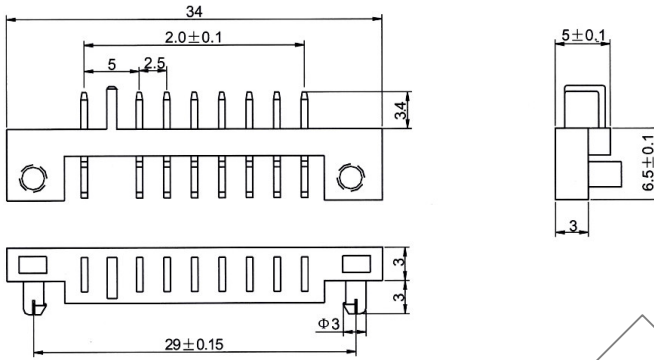

BC2.5A-8P

