

Dual Row, Female, Vertical, DIP Type D-SUB:




SPECIFICATIONS

Power Rating:	5.0A/125V AC, DC
Operating Temperature:	-55°C ~+105°C
Relative Humidity:	93%, +40°C
Dielectric Withstanding:	1000V AC/minute
Contact Resistance:	≤ 10 mΩ/Contact
Insulator Resistance:	≥ 1000 MΩ at 500V
Material:	
Insulator:	PBT + 30% GF, UL94V-0
Contact Pin:	Copper Alloy
Shell:	Steel, Ni/Tin Plated
Contact Plating:	Selective Au plated Over 50u" Ni on contact pin

ROHS Compliance

DB-9PF-XA, DB-15PF-XA, DB-25PF-XA, DB-37PF-XA

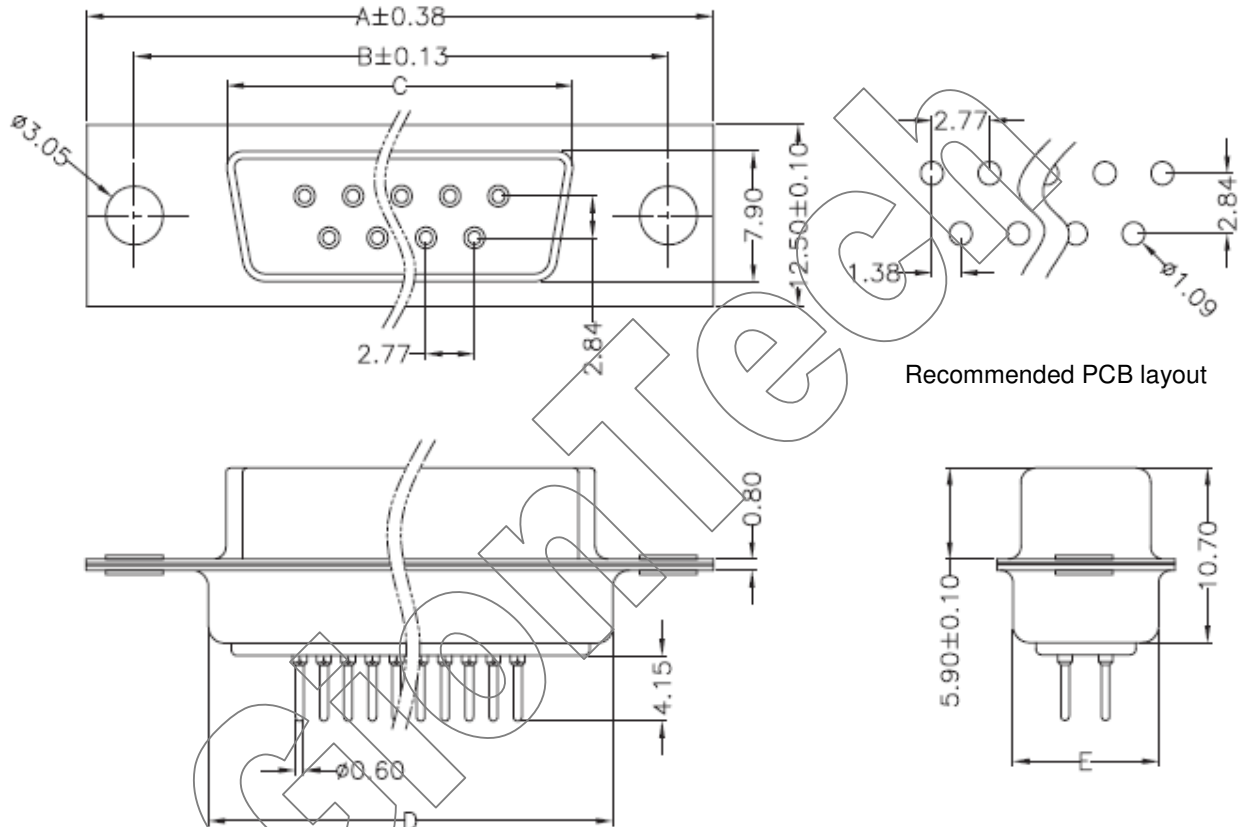

Circuit	Part No. (w/o Locking)	Dimensions (mm)					Colour Code (X)	Colour
		A	B	C	D	E		
9	DB-9PF-1A	30.81	24.99	16.33	19.28	10.72	1	Black
15	DB-15PF-1A	39.14	33.32	24.66	27.65	10.72	2	White
25	DB-25PF-1A	53.04	47.04	38.38	41.30	10.72	3	Green
37	DB-37PF-1A	69.32	63.50	54.84	57.44	10.72	4	Blue
							5	Yellow