


**Dual Row, Female, Vertical, Press Type D-SUB:**

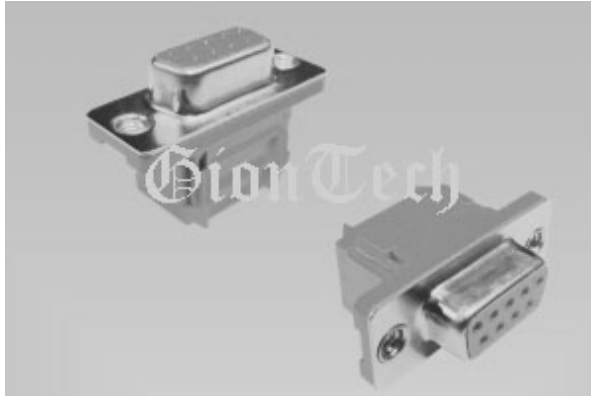


**SPECIFICATIONS**

Power Rating:	5.0A/125V AC, DC
Operating Temperature:	-55 °C ~+105 °C
Relative Humidity:	93%, +40 °C
Dielectric Withstanding:	1000V AC/minute
Contact Resistance:	≤ 10 mΩ/Contact
Insulator Resistance:	≥ 1000 MΩ at 500V
Material:	
Insulator:	PBT + 30% GF, UL94V-0
Contact Pin:	Copper Alloy
Shell:	Steel, Ni/Tin Plated
Contact Plating:	Selective Au plated Over 50u" Ni on contact pin

**ROHS Compliance**

**DP-9PF-XA, DP-15PF-XA, DP-25PF-XA, DP-37PF-XA  
DP-9PF-XAL, DP-15PF-XAL, DP-25PF-XAL, DP-37PF-XAL**

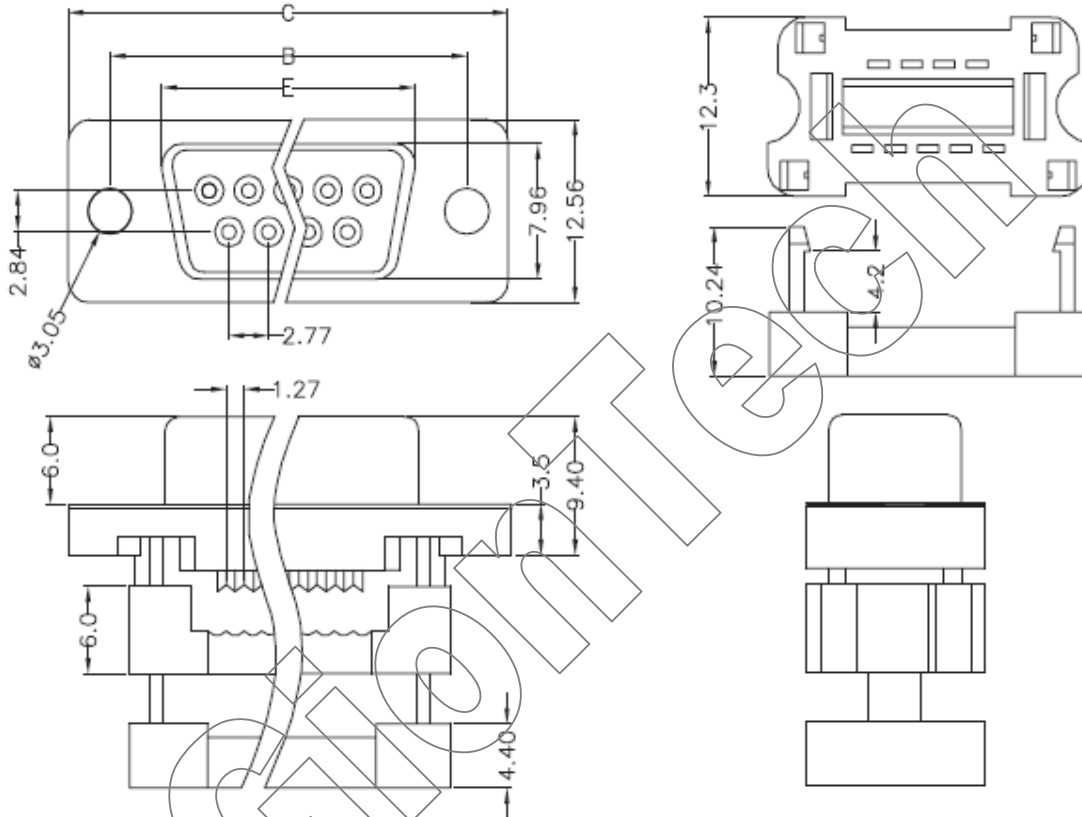

Circuit	Part No. (w/o Locking)	Dimensions (mm)					Colour Code (X)	Colour
		A	B	C	D	E		
9	DP-9PF-1A	17.78	24.99	31.04	11.86	16.35	1	Black
15	DP-15PF-1A	26.15	33.32	39.24	19.50	24.66	2	White
25	DP-25PF-1A	39.94	47.04	53.04	32.15	38.38	3	Green
37	DP-37PF-1A	56.56	63.50	69.62	48.76	54.84	4	Blue
							5	Yellow