


Micro Switch (MSL-2 Series)



SPECIFICATIONS

(G): 6A 125VAC/250VAC
6A 250VAC T85
(H): 10A 125VAC/250VAC
10A 250VAC T85

ROHS Compliance

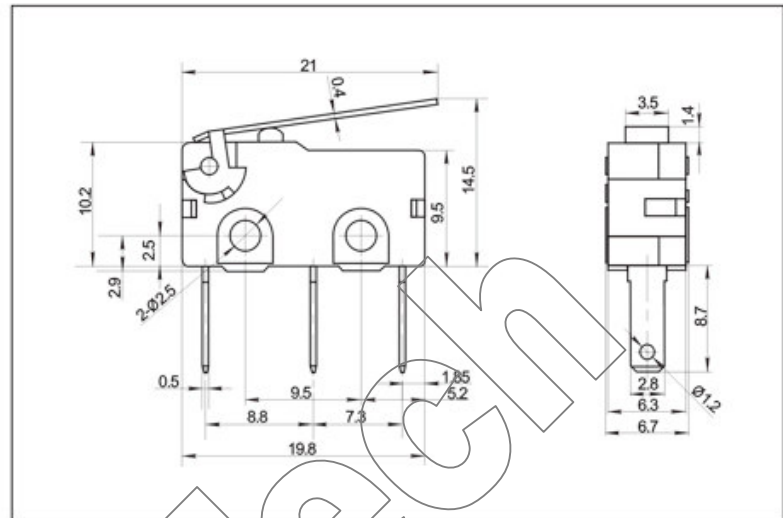

EXPLANATION MODEL NUMBER

MSL - 2 - G - D - BK - P31 - 0 - K

Rating	
H	10A 125VAC 10A 250VAC
G	6A 125/250VAC 6A 250VAC

Function	
D	(ON)-OFF 2P
E	ON-(OFF) 2P
F	(ON)-ON 3P

Color Cap/Housing	
BK	Black
WT	White
GE	Grey

Terminal	
(P31)	
(P41)	
(PCB)	
[PCB(2)]	

Lever Type	
0	Not Applicable
1	
2	
3	
4	
...	

Operating Force	
K	60±15 gf
M	150±30 gf