


1.0mm Dual Row Pin Header, Vertical, TH Type:

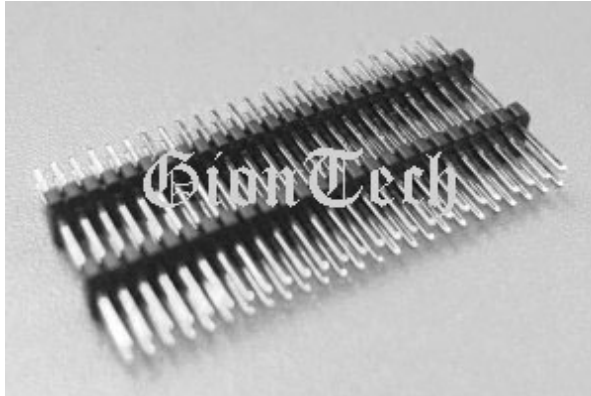

SPECIFICATIONS

| | |
|--------------------------|---------------------------------------|
| Pitch: | 1.0 mm |
| Number of contacts: | 2 to 100 pins |
| Current Rating: | 2.0A |
| Operating Temperature: | -55°C ~+105°C |
| Relative Humidity: | 93%, +40°C |
| Dielectric Withstanding: | 300V AC/minute |
| Contact Resistance: | ≤ 20 mΩ/Contact |
| Insulator Resistance: | ≥ 1000 MΩ at 100V |
| Soldering Temperature: | 230°C, 30-60s max. 260°C, 10s max. |
| Material: | |
| Base: | PBT/Nylon6T, UL94V-0 |
| Contact Pin: | Copper Alloy |
| Contact Plating: | Au or Sn Over 50u" Ni |

ROHS Compliance

PH1.0-2xXA (A/B) (H=1.0/1.5) / PHD1.0-2xXA (A/B/C) (H=1.0/1.5)

PH1.0-2xXA1 (A/B) (H=1.0/1.5) / PHD1.0-2xXA1 (A/B/C) (H=1.0/1.5)

