


1.27mm Dual Row Pin Header, Vertical, SMT Type:


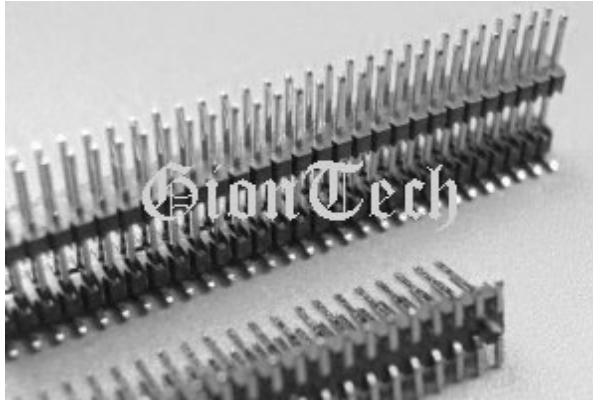


SPECIFICATIONS

Pitch:	1.27 mm
Number of contacts:	4 to 100 pins
Current Rating:	2.5A
Operating Temperature:	-55°C ~+105°C
Relative Humidity:	93%, +40°C
Dielectric Withstanding:	300V AC/minute
Contact Resistance:	≤ 20 mΩ/Contact
Insulator Resistance:	≥ 1000 MΩ at 100V
Soldering Temperature:	230°C, 30-60s max. 260°C, 10s max.
Material:	
Base:	Nylon6T/LCP, UL94V-0
Contact Pin:	Copper Alloy
Contact Plating:	Au or Sn Over 50u" Ni

ROHS Compliance

- PH1.27-2xXAB (B/D/W2) (H=0.65/1.0/1.5/2.0/2.5),**
- PH1.27-2xXAB1 (B/D/W2) (H=0.65/1.0/1.5/2.0/2.5)**
- PHD1.27-2xXAB (B/C/D/W2) (H=0.65/1.0/1.5/2.0/2.5),**
- PHD1.27-2xXAB1 (B/C/D/W2) (H=0.65/1.0/1.5/2.0/2.5)**

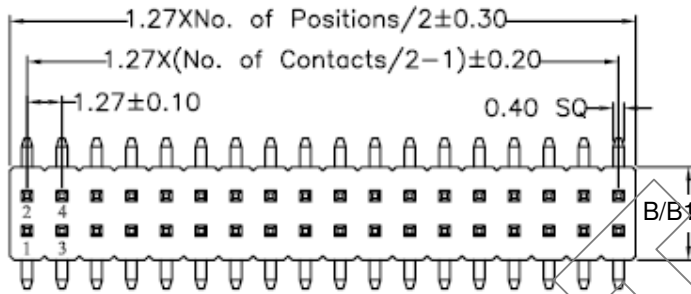

Recommended PCB layout

