


2.54mm Single/Dual Row Female Header, Vertical, TH Type:

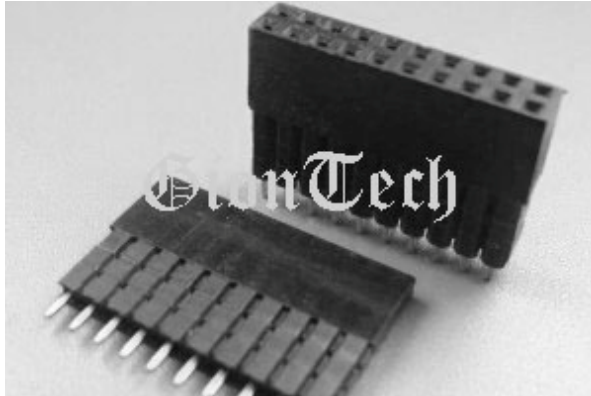

SPECIFICATIONS

Pitch: 2.54 mm
 Number of contacts: 2 to 40 pins / 4 to 80 pins
 Current Rating: 5.0A
 Operating Temperature: -55°C ~+105°C
 Relative Humidity: 93%, +40°C
 Dielectric Withstanding: 550V AC/minute
 Contact Resistance: ≤ 20 mΩ/Contact
 Insulator Resistance: ≥ 1000 MΩ at 100V
 Soldering Temperature: 230°C, 30-60s max.
 260°C, 10s max.

Material:
 Base: PBT/Nylon6T, UL94V-0
 Contact Pin: Copper Alloy
 Contact Plating: Au or Sn Over 50u" Ni

ROHS Compliance

- PHF2.54-1xXA1L4 (H=11) / PHF2.54-2xXA1L4 (H=11)**
- PHF2.54-1xXA2L4 (H=13.5) / PHF2.54-2xXA2L4 (H=13.5)**
- PHF2.54-1xXA3L4 (H=16) / PHF2.54-2xXA3L4 (H=16)**
- PHF2.54-1xXA4L4 (H=18.5) / PHF2.54-2xXA4L4 (H=18.5)**

