


2.54mm Single/Dual Row Female Header, Vertical, TH Type:

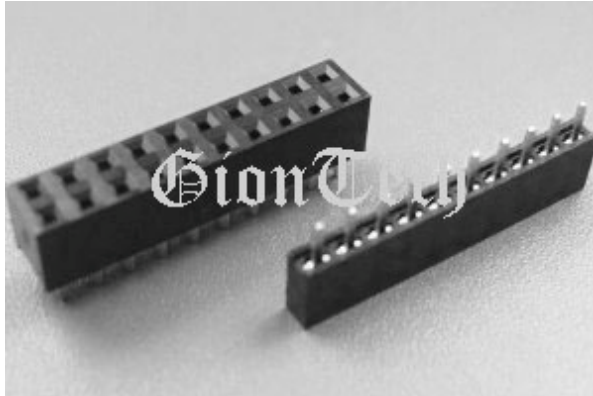

SPECIFICATIONS

| | |
|--------------------------|---------------------------------------|
| Pitch: | 2.54 mm |
| Number of contacts: | 2 to 40 pins / 4 to 80 pins |
| Current Rating: | 5.0A |
| Operating Temperature: | -55°C ~+105°C |
| Relative Humidity: | 93%, +40°C |
| Dielectric Withstanding: | 550V AC/minute |
| Contact Resistance: | ≤ 20 mΩ/Contact |
| Insulator Resistance: | ≥ 1000 MΩ at 100V |
| Soldering Temperature: | 230°C, 30-60s max. 260°C, 10s max. |
| Material: | |
| Base: | PBT/Nylon6T, UL94V-0 |
| Contact Pin: | Copper Alloy |
| Contact Plating: | Au or Sn Over 50u" Ni |

ROHS Compliance

PHF2.54-1xXAL4 (H=5.0/5.7/8.5) / PHF2.54-2xXAL4 (H=5.0/5.7/8.5)

